


# High Voltage Surface Mount Capacitors

High Rel. Space Level NPO & X7R – 500 Vdc to 10 kVdc

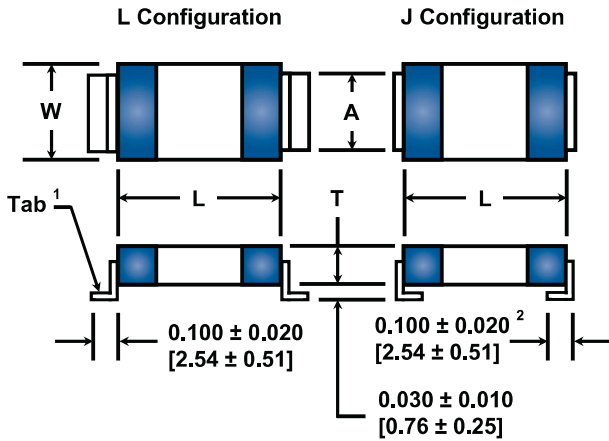

1. Tab thickness  $0.009 \pm 0.001$  [0.25 ± 0.025]
2. Tab Length SM01, SM02, SM03 @  $0.040 \pm 0.010$  [1.02 ± 0.26]

**CalRamic Technologies LLC** manufactures a series of highly reliable, mission critical, high voltage, surface mount tab leaded ceramic capacitors that are designed specifically for those non-repairable, space applications, where the assembly may be exposed to high levels of thermal and /or mechanical shock. Conservatively designed, they are ideal for use in demanding high voltage, high current environments

Intended for continuous operation at full rated voltage and across the entire operating temperature range, these capacitors utilize a special internal design specifically intended to reduce electric field stresses, thereby providing a device that exhibits very low ESR characteristics and no reduction in insulation resistance with life.

Available with ultra-stable Class I, NPO and stable Class II, X7R / BR dielectric materials, these capacitors are ideally suited for timing / precision circuitry, energy storage, DC blocking, snubbers, transient suppression, decoupling, resonators and EMI filtering applications.

## Performance Characteristics

Specification	Dielectric Type (EIA Designation)	
	NPO (COG)	X7R [BR]
Material Classification	Type I, Ultra Stable, K90	Type II, Stable, K2500
Coefficient of Thermal Expansion	$9 \times 10^{-6} / ^\circ\text{C}$	$11 \times 10^{-6} / ^\circ\text{C}$
Density	67 g / in <sup>3</sup>	
Operating Temperature Range	-55 to +125°C	
Aging Rate	0	-2% Max per decade hour
Temperature Coefficient	±30 PPM / °C	±15%
Voltage Coefficient	Negligible	Range -40% Max @ WVDC
Capacitance Range	12 pF to 0.22 µF	270 pF to 2.2 µF
Voltage Range	500 VDC to 10 kVDC	
Insulation Resistance @ +25°C	100,000 MΩ or 1000 MΩ - µF, W/E is less	
Insulation Resistance @ +125°C	10,000 MΩ or 100 MΩ - µF, W/E is less	
Dissipation Factor	0.1% Max	2.5% Max
DWV	1.5 X WVDC ≤ 1250 Vdc or 1.2 X WVDC > 1250 Vdc	

## Mechanical Dimensions

Dimensions Inches [mm]	Product Style												
	SM01	SM02	SM03	SM10	SM04	SM11	SM05	SM06	SM07	SM13	SM14	SM15	SM16
Length [L]	0.150 ± 0.015 [3.81 ± 0.38]	0.200 ± 0.020 [5.08 ± 0.51]	0.250 ± 0.025 [6.35 ± 0.64]	0.300 ± 0.030 [7.62 ± 0.76]	0.350 ± 0.030 [8.89 ± 0.76]	0.400 ± 0.030 [10.20 ± 0.76]	0.450 ± 0.030 [11.43 ± 0.76]	0.550 ± 0.030 [14.00 ± 0.76]	0.650 ± 0.030 [16.50 ± 0.76]	0.700 ± 0.030 [17.80 ± 0.76]	0.900 ± 0.030 [22.90 ± 0.76]	1.100 ± 0.030 [27.90 ± 0.76]	1.300 ± 0.030 [33.02 ± 0.76]
Width [W]	0.150 ± 0.015 [3.81 ± 0.38]	0.200 ± 0.020 [5.08 ± 0.51]	0.200 ± 0.020 [5.08 ± 0.51]	0.150 ± 0.015 [3.81 ± 0.38]	0.300 ± 0.030 [7.62 ± 0.76]	0.200 ± 0.020 [5.08 ± 0.51]	0.400 ± 0.030 [10.16 ± 0.76]	0.500 ± 0.030 [12.70 ± 0.76]	0.600 ± 0.030 [15.24 ± 0.76]	0.300 ± 0.030 [7.62 ± 0.76]	0.400 ± 0.030 [10.16 ± 0.76]	0.500 ± 0.030 [12.70 ± 0.76]	0.600 ± 0.030 [15.24 ± 0.76]
Thickness [T] [Max]	0.130 [3.30]	0.180 [4.57]	0.180 [4.57]	0.140 [3.55]	0.220 [5.59]	0.130 [3.30]	0.220 [5.59]	0.220 [5.59]	0.220 [5.59]	0.220 [5.59]	.180 [4.57]	0.220 [5.59]	0.220 [5.59]
Tab [A] [Max]	0.100 [2.54]	0.100 [2.54]	0.100 [2.54]	0.100 [2.54]	0.200 [5.08]	0.100 [2.54]	0.300 [7.62]	0.400 [10.2]	0.500 [12.7]	0.200 [5.08]	0.300 [7.62]	0.400 [10.2]	0.500 [12.7]

# High Voltage Surface Mount Capacitors

High Rel. Space Level NPO & X7R – 500 Vdc to 10 kVdc



## Electrical Characteristics


NPO Capacitance Range														
Style	HS01	HS02	HS03	HS04	HS05	HS06	HS07	HS10	HS11	HS13	HS14	HS15	HS16	
Min Cap	120	220	270	270	180	270	470	100	100	120	180	330	560	
WVDC	500	392	682	822	183	473	683	823	123	223	104	124	184	224
	1000	122	272	472	153	253	393	473	332	682	473	563	823	124
	2000	561	681	821	252	562	822	183	681	182	822	123	183	223
	3000	•	•	471	122	272	472	562	271	681	392	472	123	153
	4000	•	•	•	•	102	182	272	•	561	152	332	472	822
	5000	•	•	•	•	561	152	222	•	251	122	222	392	392
	7000	•	•	•	•	•	•	•	•	•	821	102	122	222
	10000	•	•	•	•	•	•	•	•	•	•	•	102	152

X7R Capacitance Range														
Style	HS01	HS02	HS03	HS04	HS05	HS06	HS07	HS10	HS11	HS13	HS14	HS15	HS16	
Min Cap	271	561	681	271	471	681	122	151	271	221	471	821	122	
WVDC	500	273	823	104	274	474	684	105	823	154	684	105	225	
	1000	682	223	273	823	154	224	334	183	473	224	274	684	
	2000	122	472	682	153	273	473	683	332	103	333	683	154	
	3000	•	•	•	562	123	223	333	122	392	153	273	473	683
	4000	•	•	•	•	472	822	123	•	222	682	153	223	333
	5000	•	•	•	•	392	472	522	•	821	392	822	123	223
	7000	•	•	•	•	•	•	•	•	•	272	472	682	822
	10000	•	•	•	•	•	•	•	•	•	•	•	332	562

## Notes

- Product receives 100% Group A Inspection in accordance with MIL-PRF-49467, including Partial Discharge (Corona).
- Special testing including 100% Ultrasound (C-SAM) is available upon request.
- Custom voltages, package sizes and capacitance values available. Contact factory.
- X7R dielectrics are not intended for AC line filtering applications.
- Space level products are capable of meeting a minimum of 4000 hours life at full rated conditions.
- Large ceramic capacitors, even leaded devices are susceptible to damage when exposed to thermal and / or mechanical shock. Refer to Technical Bulletin AN101/AN112 for handling and installation recommendations.
- High voltage products may require additional conformal coating to prevent possible arc over.


## Part Number / Ordering Information

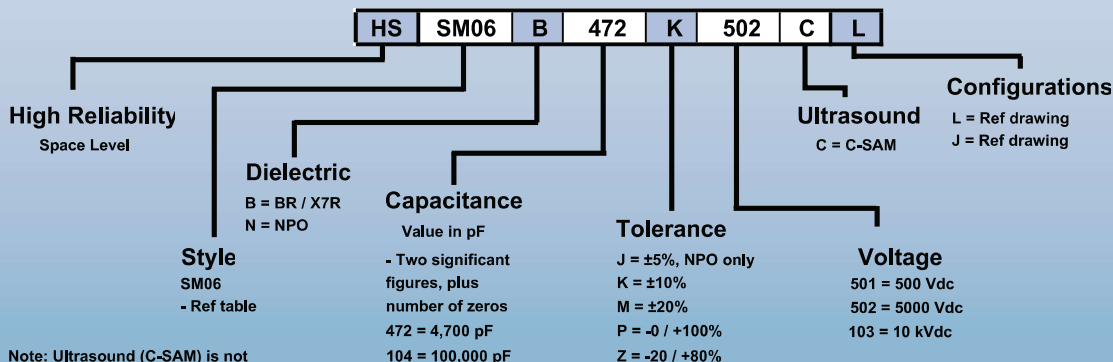


# High Voltage Surface Mount Capacitors

High Rel. Space Level NPO & X7R – 500 Vdc to 10 kVdc


## Performance Charts (Typical)

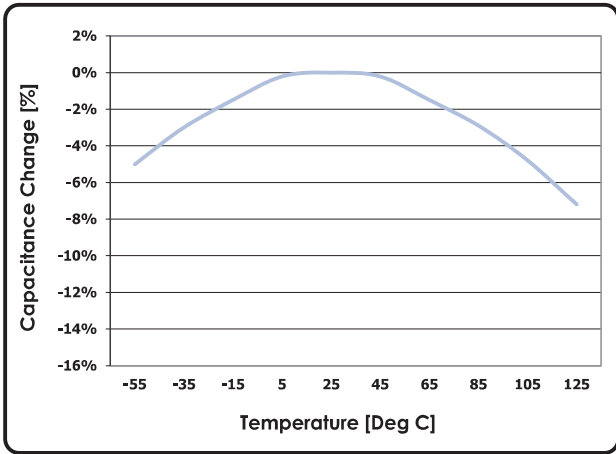


**X7R Temperature Coefficient**

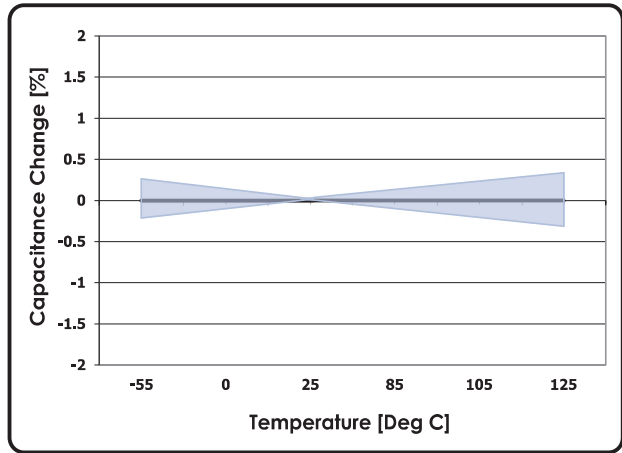


**NPO Temperature Coefficient**

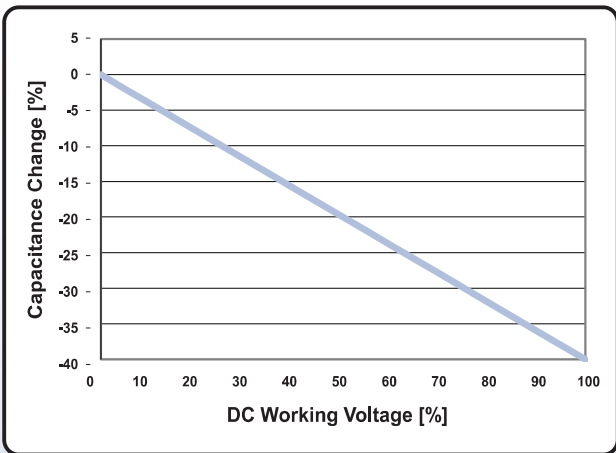


**Voltage Coefficient [BR]**

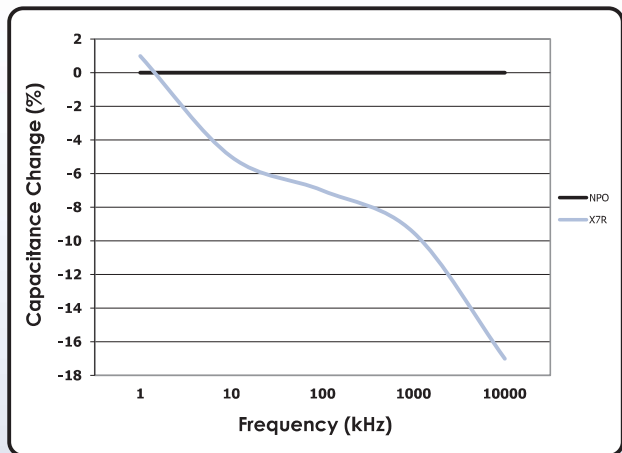

**Capacitance Vs Frequency**

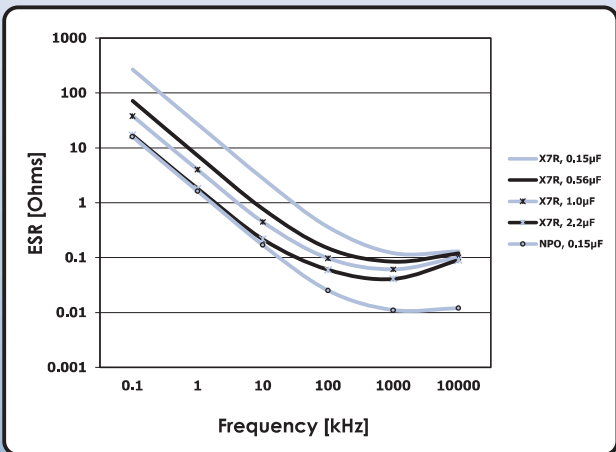

**ESR Vs Frequency**

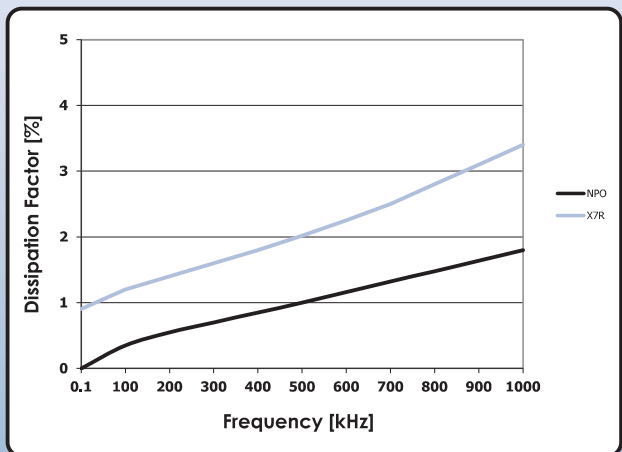

**DF Vs Frequency**